









T207-10

10 t - 67,5 m

TECHNICAL DATA SHEET

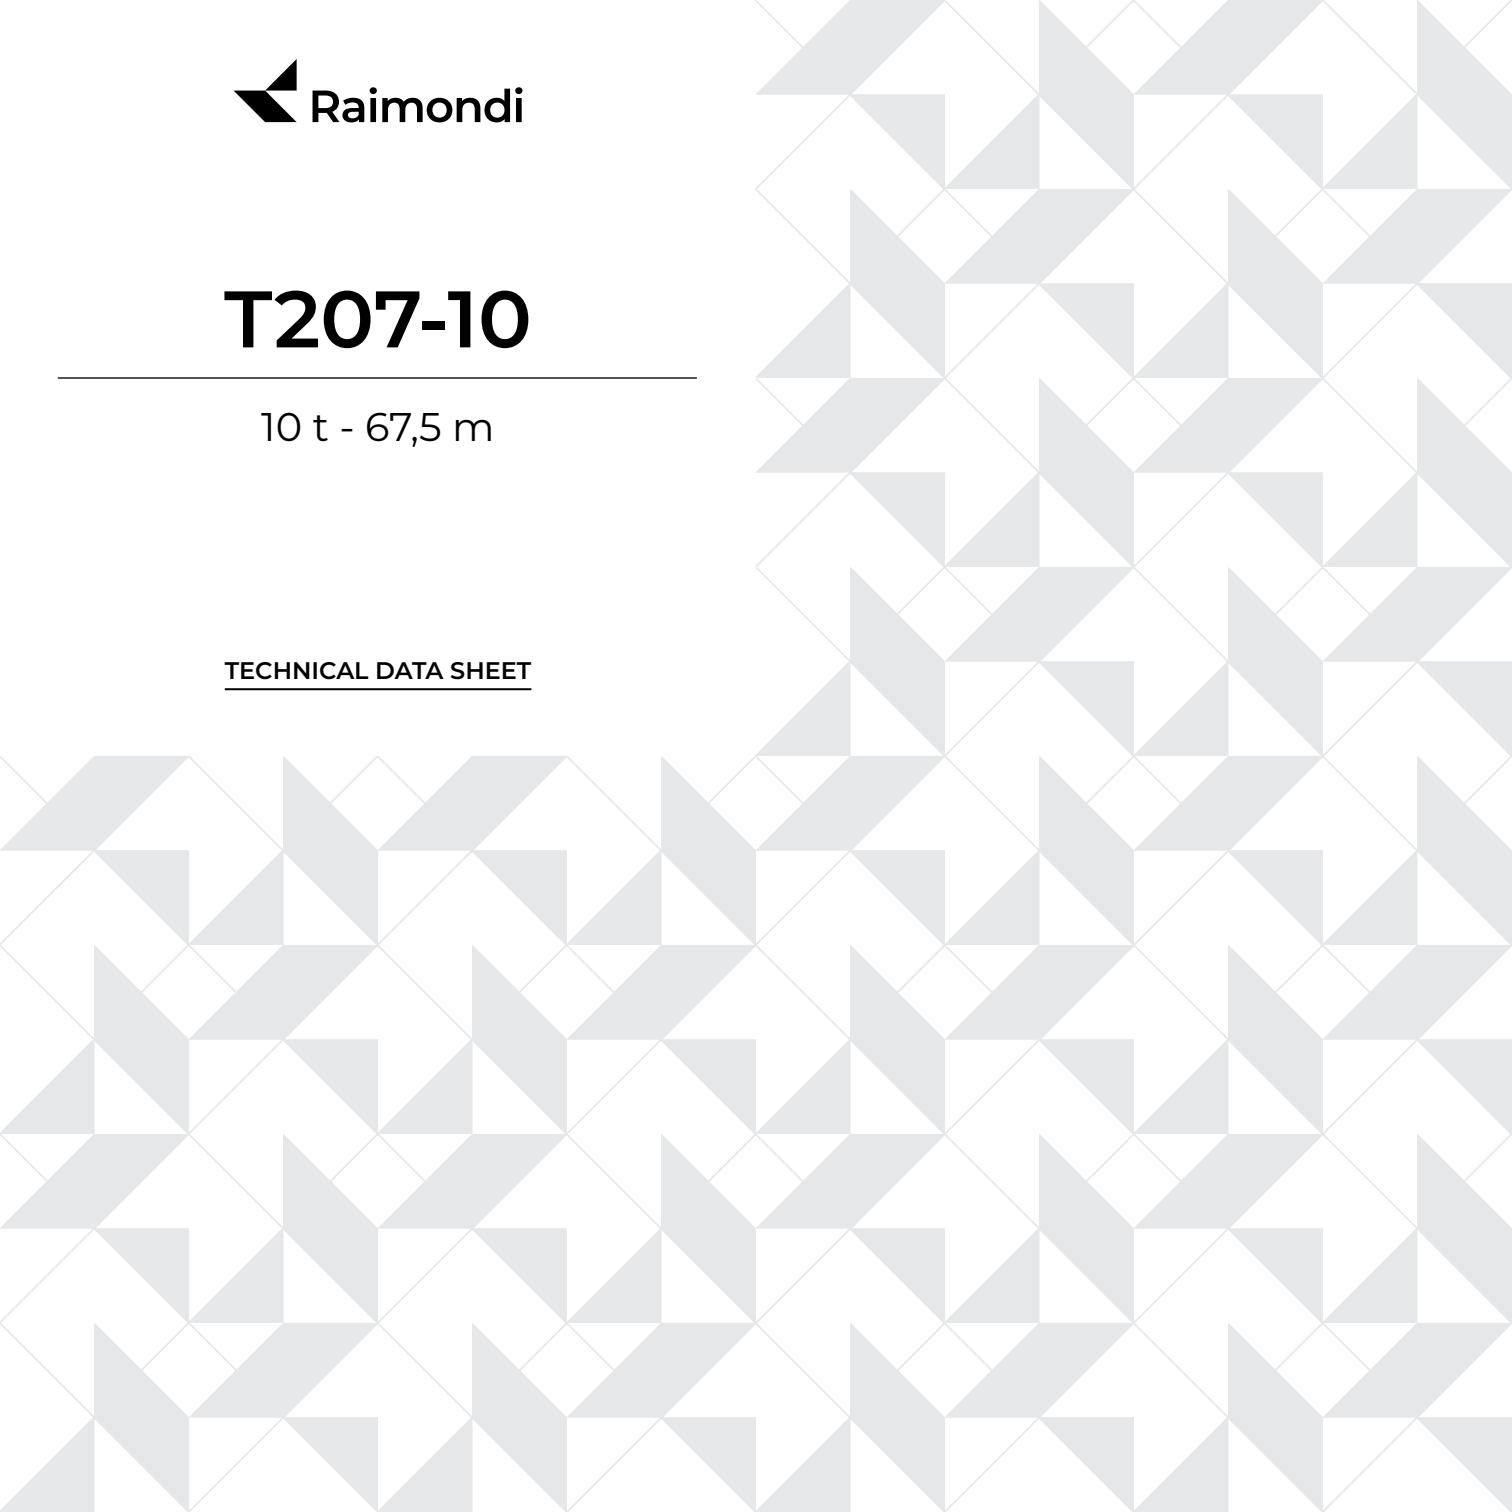

Configurations Configurazioni Configurations Konfigurationen Конфигурация

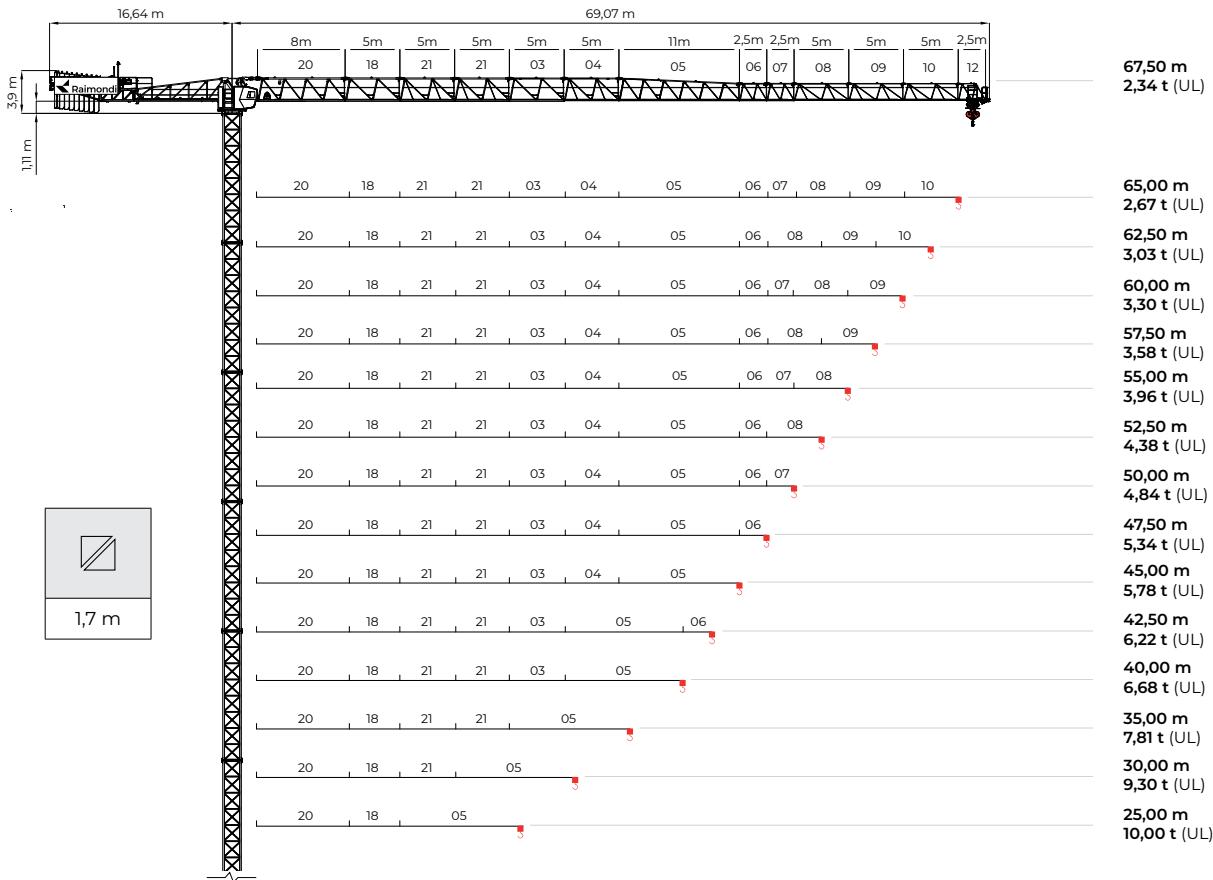

Mechanisms

Azionamenti

Actionnements

Antriebe

Приводы

10 t		5 t		10 t	
	2 x 7,5 kW				2 x 7,5 kW
	0-0,8 min				0-0,8 min
	30 kW - 30 Hz				37 kW - 25 Hz
	Ø 12 - 510 m				Ø 16 - 225 m
	6,6 kW - 50 Hz				6,6 kW - 50 Hz
	Ø 8				Ø 8
	13 - 74 m/min				13 - 74 m/min

Counterweighting

Contrappesatura

Contrepoids

Gegenauslegerballast

балласт контр-стрелы

 (m)	 Q.ty x (kg 3000)	 Q.ty x (kg 1500)	 Tot. (kg)
67,5	7	3	25500
65	7	2	24000
62,5	7	2	24000
60	7	2	24000
57,5	7	2	24000
55	7	2	24000
52,5	7	2	24000
50	7	2	24000
47,5	7	2	24000
45	7	1	22500
42,5	7	1	22500
40	6	2	21000
35	6	1	19500
30	5	1	16500
25	4	1	13500

Load curves	Curve di carico	Courbes de charges	Lastkurven	Кривые нагрузок
-------------	-----------------	--------------------	------------	-----------------

 (m)	17,50	18,75	20,00	25,00	30,00	35,00	40,00	42,50	45,00	47,50	50,00	52,50	55,00	57,50	60,00	62,50	65,00	67,50	
 	 10 t						 5 t												
67,5 STD	18,41	10,00	9,80	9,10	7,05	5,69	4,73	4,04	3,76	3,51	3,28	3,08	2,90	2,74	2,59	2,45	2,32	2,21	2,10
67,5 UL	19,64	10,00	10,00	9,80	7,60	6,15	5,12	4,39	4,09	3,82	3,58	3,37	3,17	3,00	2,83	2,69	2,55	2,43	2,31
65 STD	19,52	10,00	10,00	9,73	7,54	6,11	5,09	4,35	4,05	3,79	3,55	3,33	3,14	2,96	2,81	2,66	2,52	2,40	
65 UL	20,88	10,00	10,00	10,00	8,15	6,61	5,52	4,74	4,42	4,13	3,88	3,65	3,44	3,25	3,08	2,92	2,77	2,64	
62,5 STD	19,92	10,00	10,00	9,96	7,73	6,26	5,21	4,47	4,16	3,89	3,65	3,43	3,23	3,05	2,89	2,74	2,60		
62,5 UL	21,34	10,00	10,00	10,00	8,36	6,78	5,66	4,88	4,55	4,25	3,99	3,75	3,54	3,35	3,17	3,01	2,86		
60 STD	20,51	10,00	10,00	10,00	7,99	6,47	5,40	4,64	4,32	4,04	3,79	3,56	3,36	3,17	3,00	2,85			
60 UL	22,01	10,00	10,00	10,00	8,66	7,03	5,88	5,02	4,73	4,42	4,15	3,91	3,69	3,49	3,30	3,14			
57,5 STD	20,98	10,00	10,00	10,00	8,20	6,65	5,55	4,78	4,45	4,16	3,91	3,67	3,46	3,27	3,10				
57,5 UL	22,54	10,00	10,00	10,00	8,90	7,23	6,05	5,16	4,86	4,56	4,28	4,03	3,80	3,60	3,41				
55 STD	21,83	10,00	10,00	10,00	8,58	6,96	5,82	5,00	4,68	4,38	4,11	3,87	3,65	3,45					
55 UL	23,50	10,00	10,00	10,00	9,33	7,59	6,35	5,43	5,05	4,80	4,51	4,25	4,01	3,80					
52,5 STD	22,67	10,00	10,00	10,00	8,95	7,27	6,09	5,20	4,91	4,59	4,31	4,06	3,83						
52,5 UL	24,44	10,00	10,00	10,00	9,75	7,93	6,65	5,69	5,30	5,00	4,73	4,46	4,21						
50 STD	23,51	10,00	10,00	10,00	9,33	7,59	6,35	5,43	5,05	4,81	4,51	4,25							
50 UL	25,39	10,00	10,00	10,00	10,00	8,29	6,95	5,95	5,54	5,18	4,96	4,68							
47,5 STD	24,29	10,00	10,00	10,00	9,68	7,88	6,60	5,65	5,26	5,00	4,70								
47,5 UL	26,27	10,00	10,00	10,00	10,00	8,61	7,23	6,19	5,77	5,40	5,06								
45 STD	24,66	10,00	10,00	10,00	9,85	8,01	6,72	5,75	5,35	5,00									
45 UL	26,69	10,00	10,00	10,00	10,00	8,77	7,36	6,31	5,88	5,50									
42,5 STD	24,84	10,00	10,00	10,00	9,93	8,08	6,77	5,80	5,40										
42,5 UL	26,91	10,00	10,00	10,00	10,00	8,85	7,43	6,37	5,94										
40 STD	24,91	10,00	10,00	10,00	9,96	8,11	6,80	5,82											
40 UL	27,01	10,00	10,00	10,00	10,00	8,89	7,46	6,40											
35 STD	25,08	10,00	10,00	10,00	10,00	8,17	6,85												
35 UL	27,24	10,00	10,00	10,00	10,00	8,97	7,54												
30 STD	25,16	10,00	10,00	10,00	10,00	8,20													
30 UL	26,70	10,00	10,00	10,00	10,00	8,77													
25 STD	25,00	10,00	10,00	10,00	10,00														
25 UL	25,00	10,00	10,00	10,00	10,00														

Load curves	Curve di carico	Courbes de charges		Lastkurven		Кривые нагрузок														
	(m)	17,50	18,75	20,00	25,00	30,00	35,00	40,00	42,50	45,00	47,50	50,00	52,50	55,00	57,50	60,00	62,50	65,00	67,50	
																				
67,5 STD	18,54	10,00	9,87	9,19	7,14	5,80	4,85	4,14	3,84	3,59	3,35	3,15	2,96	2,79	2,63	2,49	2,36	2,24	2,13	
67,5 UL	19,86	10,00	10,00	9,92	7,73	6,28	5,26	4,50	4,18	3,91	3,66	3,44	3,23	3,05	2,89	2,73	2,59	2,46	2,34	
65 STD	19,67	10,00	10,00	9,82	7,64	6,21	5,20	4,44	4,13	3,86	3,61	3,39	3,19	3,01	2,85	2,70	2,56	2,43		
65 UL	21,12	10,00	10,00	10,00	8,29	6,75	5,66	4,84	4,51	4,21	3,95	3,71	3,50	3,30	3,12	2,96	2,81	2,67		
62,5 STD	20,77	10,00	10,00	10,00	8,13	6,62	5,55	4,75	4,42	4,13	3,87	3,63	3,42	3,23	3,06	2,90	2,75			
62,5 UL	22,36	10,00	10,00	10,00	8,83	7,20	6,04	5,18	4,82	4,51	4,23	3,98	3,75	3,54	3,36	3,18	3,03			
60 STD	21,34	10,00	10,00	10,00	8,38	6,83	5,72	4,90	4,56	4,27	4,00	3,76	3,54	3,34	3,16	3,00				
60 UL	23,00	10,00	10,00	10,00	9,12	7,43	6,24	5,35	4,99	4,67	4,38	4,12	3,88	3,67	3,48	3,30				
57,5 STD	21,79	10,00	10,00	10,00	8,58	6,99	5,87	5,03	4,68	4,37	4,10	3,86	3,63	3,43	3,25					
57,5 UL	23,51	10,00	10,00	10,00	9,34	7,62	6,40	5,49	5,12	4,79	4,50	4,23	3,99	3,77	3,58					
55 STD	22,64	10,00	10,00	10,00	8,96	7,30	6,13	5,26	4,90	4,58	4,29	4,04	3,81	3,60						
55 UL	24,46	10,00	10,00	10,00	9,76	7,97	6,70	5,75	5,36	5,02	4,71	4,44	4,19	3,96						
52,5 STD	23,46	10,00	10,00	10,00	9,32	7,60	6,39	5,48	5,11	4,78	4,48	4,22	3,98							
52,5 UL	25,38	10,00	10,00	10,00	10,00	8,31	6,99	6,00	5,60	5,24	4,92	4,64	4,38							
50 STD	24,29	10,00	10,00	10,00	9,69	7,91	6,65	5,71	5,32	4,98	4,67	4,40								
50 UL	26,31	10,00	10,00	10,00	10,00	8,65	7,28	6,26	5,84	5,47	5,14	4,84								
47,5 STD	25,06	10,00	10,00	10,00	10,00	8,19	6,89	5,92	5,52	5,17	4,85									
47,5 UL	27,17	10,00	10,00	10,00	10,00	8,96	7,55	6,49	6,06	5,68	5,34									
45 STD	25,40	10,00	10,00	10,00	10,00	8,32	7,00	6,01	5,61	5,25										
45 UL	27,57	10,00	10,00	10,00	10,00	9,11	7,67	6,60	6,16	5,78										
42,5 STD	25,57	10,00	10,00	10,00	10,00	8,38	7,05	6,06	5,65											
42,5 UL	27,77	10,00	10,00	10,00	10,00	9,18	7,74	6,66	6,22											
40 STD	25,62	10,00	10,00	10,00	10,00	8,39	7,06	6,07												
40 UL	27,84	10,00	10,00	10,00	10,00	9,21	7,76	6,68												
35 STD	25,74	10,00	10,00	10,00	10,00	8,44	7,10													
35 UL	28,01	10,00	10,00	10,00	10,00	9,27	7,81													
30 STD	25,77	10,00	10,00	10,00	10,00	8,45														
30 UL	28,08	10,00	10,00	10,00	10,00	9,30														
25 STD	25,00	10,00	10,00	10,00	10,00															
25 UL	25,00	10,00	10,00	10,00	10,00															

Hoisting Sollevamento Levage Heben Подъем




30 kW - 30 Hz



Ø 12 - 510 m

			
(kg)	(kg)	(m/min)	(m/min)
5000	10000	0,83	0,42
5000	10000	25,04	12,52
4500	9000	26,71	13,35
4000	8000	30,04	15,02
3500	7000	34,22	17,11
3000	6000	39,22	19,61
2750	5500	42,56	21,28
2500	5000	46,74	23,37
2250	4500	50,91	25,45
2000	4000	56,75	28,38
1750	3500	64,26	32,13
1500	3000	73,44	36,72
1250	2500	85,96	42,98
1000	2000	103,49	51,74
750	1500	104,32	52,16
500	1000	104,32	52,16
0	0	104,32	52,16

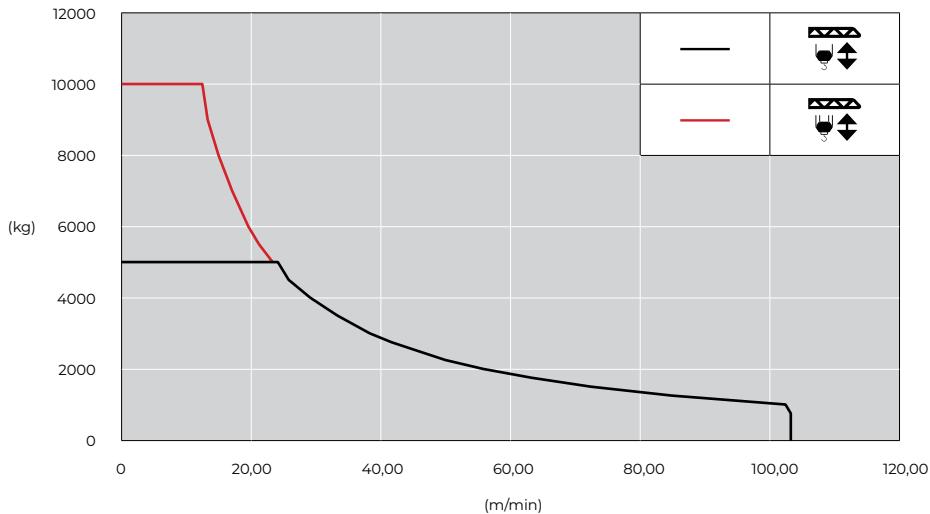

Hoisting Sollevamento Levage Heben Подъём




37 kW - 25 Hz



Ø 16 - 225 m

	
(kg)	(m/min)
10000	0,56
10000	18,00
9000	20,29
8000	22,54
7000	25,36
6000	29,31
5500	32,69
5000	34,94
4500	38,32
4000	42,27
3500	47,91
3000	56,36
2500	64,81
2000	70,45
1500	70,45
1000	70,45
0	70,45

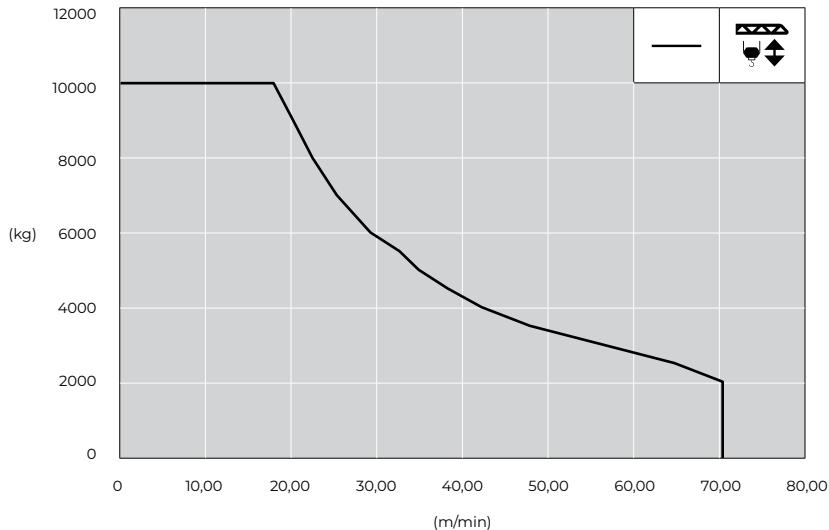

Height under hook

Altezza sotto gancio


Hauteur sous crochet

Höhe unter dem Haken

Высота под крюком

			E	---
(m)	(type)	EN 14439 C25	D	1,7 CITY Standard (2,95 m)
1,7	CITY		C	1,7 CITY Standard (5,9 m)
			B	---

						
(m)	(m)	(t)	(type)	(type)	(type)	(t)
67,5	44,4	112,2	---	---	Base 4,5 m HEB900 (1,7 CITY)	5,100

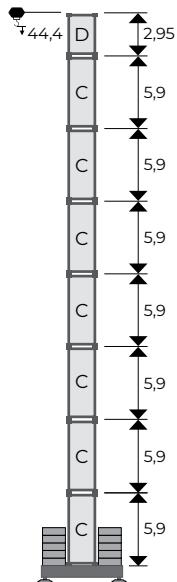

 (m)		 (t) max	 (m)													
			67,5	65	62,5	60	57,5	55	52,5	50	47,5	45	42,5	40	35	30
44,4	7xC + 1xD	91,8	91,8	81,6	91,8	/	/	/	/	/	/	/	/	/	/	/
41,5	7xC	102	81,6	71,4	81,6	81,6	91,8	102	/	/	/	/	/	/	/	/
38,5	6xC + 1xD	102	71,4	61,2	71,4	71,4	81,6	91,8	91,8	102	/	/	/	/	/	/
35,6	6xC	112,2	71,4	61,2	61,2	71,4	71,4	81,6	91,8	91,8	102	91,8	112,2	102	112,2	102
29,7	5xC	91,8	71,4	61,2	61,2	61,2	61,2	71,4	71,4	81,6	81,6	91,8	91,8	91,8	91,8	81,6
23,8	4xC	81,6	71,4	61,2	61,2	61,2	51	51	61,2	61,2	71,4	71,4	81,6	71,4	81,6	71,4
17,9	3xC	81,6	71,4	61,2	61,2	61,2	51	51	51	61,2	71,4	71,4	81,6	71,4	81,6	71,4

/ Not allowed configuration



For different heights contact the technical department / Per altezze diverse contattare l'ufficio tecnico / Pour des hauteurs différentes contact le département technique / Für unterschiedliche Höhen Kontakt zum Technischen / Недопустимо увеличение высоты крана без согласования с технической службой производителя


Height under hook	Altezza sotto gancio	Hauteur sous crochet	Höhe unter dem Haken	Высота под крюком
-------------------	----------------------	----------------------	----------------------	-------------------

(m)	(type)	EN 14439 C25
1,7	CITY	

E	---
D	1,7 CITY Standard (2,95 m)
C	1,7 CITY Standard (5,9 m)
B	---

(m)	(m)	(t)
67,5	43,4	---

(type)	(type)	(type)	(t)
1,7 CITY	---	---	---

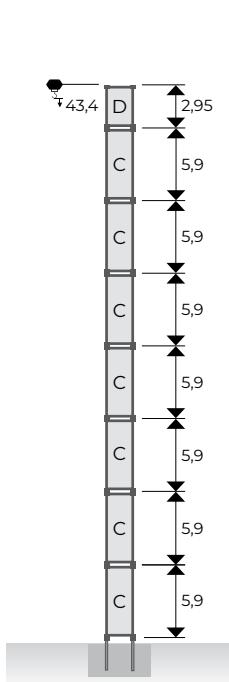

		(m)														
(m)		67,5	65	62,5	60	57,5	55	52,5	50	47,5	45	42,5	40	35	30	25
43,4	7xC + 1xD	X	X	X	/	/	/	/	/	/	/	/	/	/	/	/
40,5	7xC	X	X	X	X	X	X	/	/	/	/	/	/	/	/	/
37,5	6xC + 1xD	X	X	X	X	X	X	X	X	/	/	/	/	/	/	/
34,6	6xC	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
28,7	5xC	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
22,8	4xC	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
16,9	3xC	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

/	Not allowed configuration	X	Allowed configuration	1	Achievable without Booster element
---	---------------------------	---	-----------------------	---	------------------------------------

For different heights contact the technical department / Per altezze diverse contattare l'ufficio tecnico / Pour des hauteurs différentes contact le département technique / Für unterschiedliche Höhen Kontakt zum Technischen / Недопустимо увеличение высоты крана без согласования с технической службой производителя

Height under hook

Altezza sotto gancio


Hauteur sous crochet

Höhe unter dem Haken

Высота под крюком

			E	---
(m)	(type)	EN 14439 C25	D	1,7 RTZ Standard (2,95 m)
1,7	RTZ		C	1,7 RTZ Standard (5,9 m)
			B	---

						
(m)	(m)	(t)	(type)	(type)	(type)	(t)
67,5	48	130	---	---	Base 4,5 m HEB900 (1,7 RTZ)	5,000

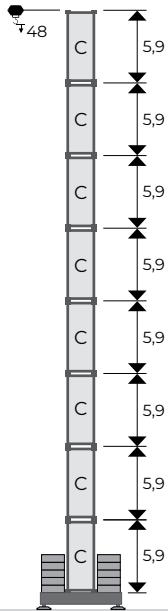

 (m)		 (t) max	 (m)														
			67,5	65	62,5	60	57,5	55	52,5	50	47,5	45	42,5	40	35	30	25
48	8xC	110	100	110	/	/	/	/	/	/	/	/	/	/	/	/	
45	7xC + 1xD	110	90	100	110	100	110	110	/	/	/	/	/	/	/	/	
42	7xC	130	80	90	90	90	100	100	110	120	120	120	120	130	120	130	120
39	6xC + 1xD	120	70	80	80	80	90	90	100	100	110	110	110	120	110	120	110
36	6xC	110	70	70	70	70	80	80	90	90	100	100	100	110	100	110	110
30	5xC	90	70	60	60	60	60	60	70	80	90	80	80	90	90	90	90
24	4xC	80	70	60	60	60	50	50	60	60	70	70	70	80	70	80	80
18	3xC	80	70	60	60	60	50	50	50	60	70	70	70	70	70	80	80

/ Not allowed configuration



For different heights contact the technical department / Per altezze diverse contattare l'ufficio tecnico / Pour des hauteurs différentes contact le département technique / Für unterschiedliche Höhen Kontakt zum Technischen / Недопустимо увеличение высоты крана без согласования с технической службой производителя


Height under hook	Altezza sotto gancio	Hauteur sous crochet	Höhe unter dem Haken	Высота под крюком
-------------------	----------------------	----------------------	----------------------	-------------------

(m)	(type)	EN 14439 C25
1,7	RTZ	

E	---
D	1,7 RTZ Standard (2,95 m)
C	1,7 RTZ Standard (5,9 m)
B	---

(m)	(m)	(t)
67,5	46	---

(type)	(type)	(type)	(t)
1,7 RTZ	---	---	---

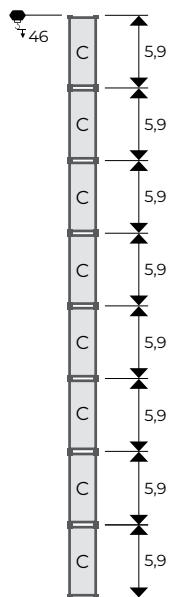

		(m)														
		67,5	65	62,5	60	57,5	55	52,5	50	47,5	45	42,5	40	35	30	25
46	8xC	X	X	/	/	/	/	/	/	/	/	/	/	/	/	/
43,5	7xC + 1xD	X	X	X	X	X	X	/	/	/	/	/	/	/	/	/
40,5	7xC	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
37,5	6xC + 1xD	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
34,5	6xC	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
29	5xC	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
23	4xC	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
17	3xC	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

/	Not allowed configuration	X	Allowed configuration	1	Achievable without Booster element
---	---------------------------	---	-----------------------	---	------------------------------------

For different heights contact the technical department / Per altezze diverse contattare l'ufficio tecnico / Pour des hauteurs différentes contact le département technique / Für unterschiedliche Höhen Kontakt zum Technischen / Недопустимо увеличение высоты крана без согласования с технической службой производителя

Height under hook

Altezza sotto gancio

Hauteur sous crochet

Höhe unter dem Haken


Высота под крюком

(m)	(type)	EN 14439 C25
2,1	GR5S	

E	GR5S/1,7 RTZ Connecting el. (1,5 m)
D	GR5S Standard (2,95 m)
C	GR5S Standard (5,9 m)
B	---

(m)	(m)	(t)
67,5	60	---

(type)	(type)	(type)	(t)
GR5S	---	---	---

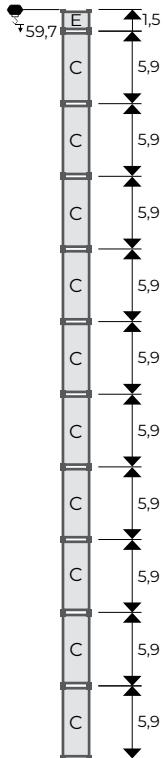

		67,5	65	62,5	60	57,5	55	52,5	50	47,5	45	42,5	40	35	30	25
59,7	10xC + 1xE		X	X	X	X	X	/	/	/	/	/	/	/	/	/
56,7	9xC + 1xD + 1xE	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
53,8	9xC + 1xE	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
47,9	8xC + 1xE	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
42,0	7xC + 1xE	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
36,1	6xC + 1xE	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
30,2	5xC + 1xE	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
24,3	4xC + 1xE	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
18,4	3xC + 1xE	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

/	Not allowed configuration	X	Allowed configuration	1	Achievable without Booster element
---	---------------------------	---	-----------------------	---	------------------------------------



For different heights contact the technical department / Per altezze diverse contattare l'ufficio tecnico / Pour des hauteurs différentes contact le département technique / Für unterschiedliche Höhen Kontakt zum Technischen / Недопустимо увеличение высоты крана без согласования с технической службой производителя

Height under hook

Altezza sotto gancio

Hauteur sous crochet

Höhe unter dem Haken


Высота под крюком

		
(m)	(type)	EN 14439 C25
2,1	GR5S	

E	GR5S/1,7 CITY Connecting el. (1,5 m)
D	GR5S Standard (2,95 m)
C	GR5S Standard (5,9 m)
B	---

		
(m)	(m)	(t)
67,5	60	---

			
(type)	(type)	(type)	(t)
GR5S	---	---	---








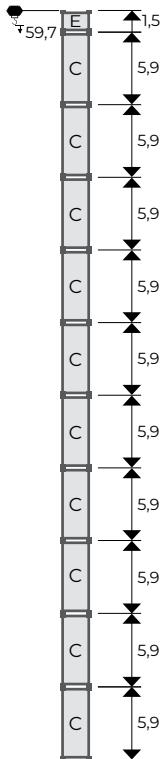









Light (m)		 (m)														
		67,5	65	62,5	60	57,5	55	52,5	50	47,5	45	42,5	40	35	30	25
59,7	10xC + 1xE		X	X	X	X	X	/	/	/	/	/	/	/	/	/
56,7	9xC + 1xD + 1xE	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
53,8	9xC + 1xE	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
47,9	8xC + 1xE	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
42,0	7xC + 1xE	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
36,1	6xC + 1xE	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
30,2	5xC + 1xE	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
24,3	4xC + 1xE	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
18,4	3xC + 1xE	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X




/	Not allowed configuration	X	Allowed configuration	1	Achievable without Booster element
---	---------------------------	---	-----------------------	---	------------------------------------



For different heights contact the technical department / Per altezze diverse contattare l'ufficio tecnico / Pour des hauteurs différentes contact le département technique / Für unterschiedliche Höhen Kontakt zum Technischen / Недопустимо увеличение высоты крана без согласования с технической службой производителя

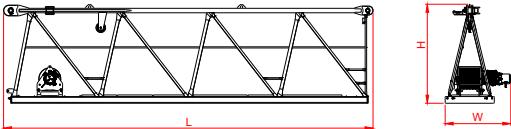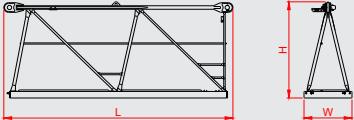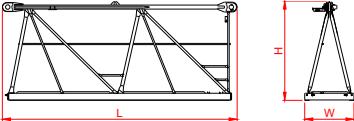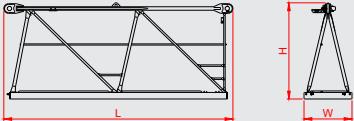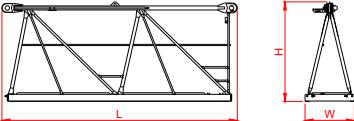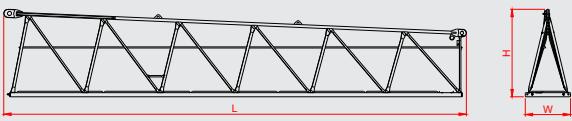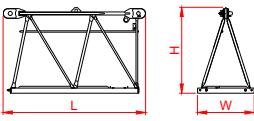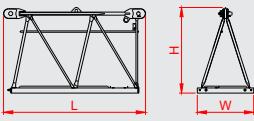Dimensions		Dimensioni			Encombremet		Abmessungen		Размеры		
ELEMENT	COMPOSITION	Q.TY	DIMENSIONS (m)			WEIGHT (kg)		DRAWING			
			L	W	H	UNIT	TOTAL				
Jib element 20	Including: trolley winch and accessories	1	8,30	1,10	2,23	3100	3100				
Jib element 18	Including: accessories	1	5,25	1,10	2,22	1400	1400				
Jib element 21	Including: accessories	1	5,24	1,10	2,23	1250	1250				
Jib element 3	Including: accessories	1	5,26	1,10	2,21	950	950				
Jib element 4	Including: accessories	1	5,26	1,10	2,16	850	850				
Jib element 5	Including: accessories	1	11,25	1,10	2,13	1500	1500				
Jib element 6	Including: accessories	1	2,77	1,10	1,67	350	350				
Jib element 7	Including: accessories	1	2,74	1,10	1,67	300	300				

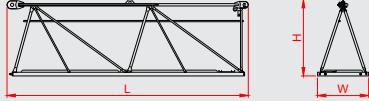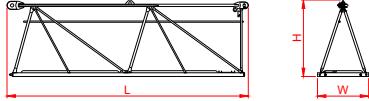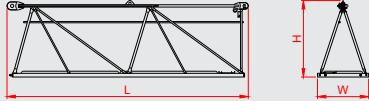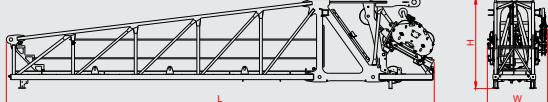Dimensions		Dimensioni			Encombremet		Abmessungen		Размеры		
ELEMENT	COMPOSITION	Q,TY	DIMENSIONS (m)			WEIGHT (kg)		DRAWING			
			L	W	H	UNIT	TOTAL				
Jib element 8	Including: accessories	1	5,19	1,10	1,65	480	480				
Jib element 9	Including: accessories	1	5,17	1,10	1,65	400	400				
Jib element 10	Including: accessories	1	5,15	1,10	1,64	350	350				
Jib element 12	Including: accessories	1	2,58	1,10	1,64	180	180				
Tip pull II	Including: rope connection device	1	0,82	1,31	1,40	120	120				
Tip pull IV	Including: rope connection device	1	0,81	1,31	1,40	100	100				
1st counterjib element	Including: gratings, trolley, hook block and accessories	1	11,44	1,61	2,44	5000	5000				

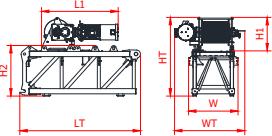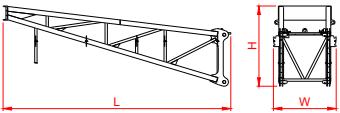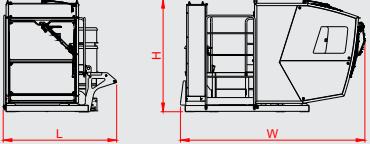Dimensions		Dimensioni		Encombremet		Abmessungen		Размеры	
ELEMENT	COMPOSITION	Q,TY	DIMENSIONS (m)			WEIGHT (kg)		DRAWING	
			LT	W	H2	UNIT	TOTAL		
Counter-intermediate jib section (winch: 30 kW)	Including: accessories	1	3,25	1,33	1,36	2700	2700		
Counter-intermediate jib section (winch: 37 kW)		1	3,25	1,33	1,36	3350	3350		
ELEMENT	COMPOSITION	Q,TY	L1	H1	HT	WT	UNIT	TOTAL	
30 kW	---	pcs 1 - depending on crane configuration	2,01	0,9	2,12	1,9	---	---	
37 kW	---		2,22	0,93	2,14	1,87	---	---	
ELEMENT	COMPOSITION	Q,TY	DIMENSIONS (m)			WEIGHT (kg)		DRAWING	
			L	W	H	UNIT	TOTAL		
Counter-jib end section	---	1	4,83	1,33	1,70	1200	1200		
Access balcony	Including: cabin, railings and electrical box	1	2,35	3,82	2,33	2000	2000		

Dimensions		Dimensioni			Encombremet		Abmessungen		Размеры		
ELEMENT	COMPOSITION	Q,TY	DIMENSIONS (m)			WEIGHT (kg)		DRAWING			
			L	W	H	UNIT	TOTAL				
Access balcony (without cabin)	Including: railings and electrical box (excluding cabin)	1	2,35	2,66	2,28	1500	1500				
Turntable, main bearing and main bearing base - tower attachment 1,7 RTZ	Including: manifold, electrical cables and accessories	1	2,11	1,90	1,82	3700	3700				
Turntable, main bearing and main bearing base - tower attachment 1,7 CITY	Including: manifold, electrical cables and accessories	1	2,13	1,92	1,79	3250	3250				
Service balcony	Including: railings	1	1,31	1,63	1,96	250	250				
Counterweight block	---	1	3,43	0,45	1,06	3000	---				
Counterweight block	---	1	3,43	0,23	1,06	1500	---				

Trasport

Transporto

Transporte

Transport

Транспортировка

	67,5 m	Top part / Parte rotante / Partie tournante / Drehender Kranteil / Поворотная часть
		Included counter weight and cabin / Cabina e contrappesi inclusi / Cabine et contrepoids incluses / Kabine und Gegengewichts Blöcke – inbegriffen / Противовес включен - кабина

	4 x 13,60 m
---	-------------

Control system

Sistema di controllo

Système de contrôle

Steuerungssystem

Система управления

	CONCORE
---	---------

The result of extensive research and development based on customer feedback, the CONCORE control system is a latest-generation software, designed and developed in-house, for use with RAIMONDI CRANES S.p.A. a S.U. production cranes.


The control system allows the crane to be used for all its permissible purposes, the main safety systems to be constantly monitored, and the main operating functions of the machine to be parameterised and customised.

The main features of the human-machine interface are:

Colour touch screen monitor with wide viewing angle LCD
Resistive touch panel
Dedicated memory capacity
Ethernet
The SD / SDHC card slot
USB host port
Remote HMI access


 Raimondi


Key

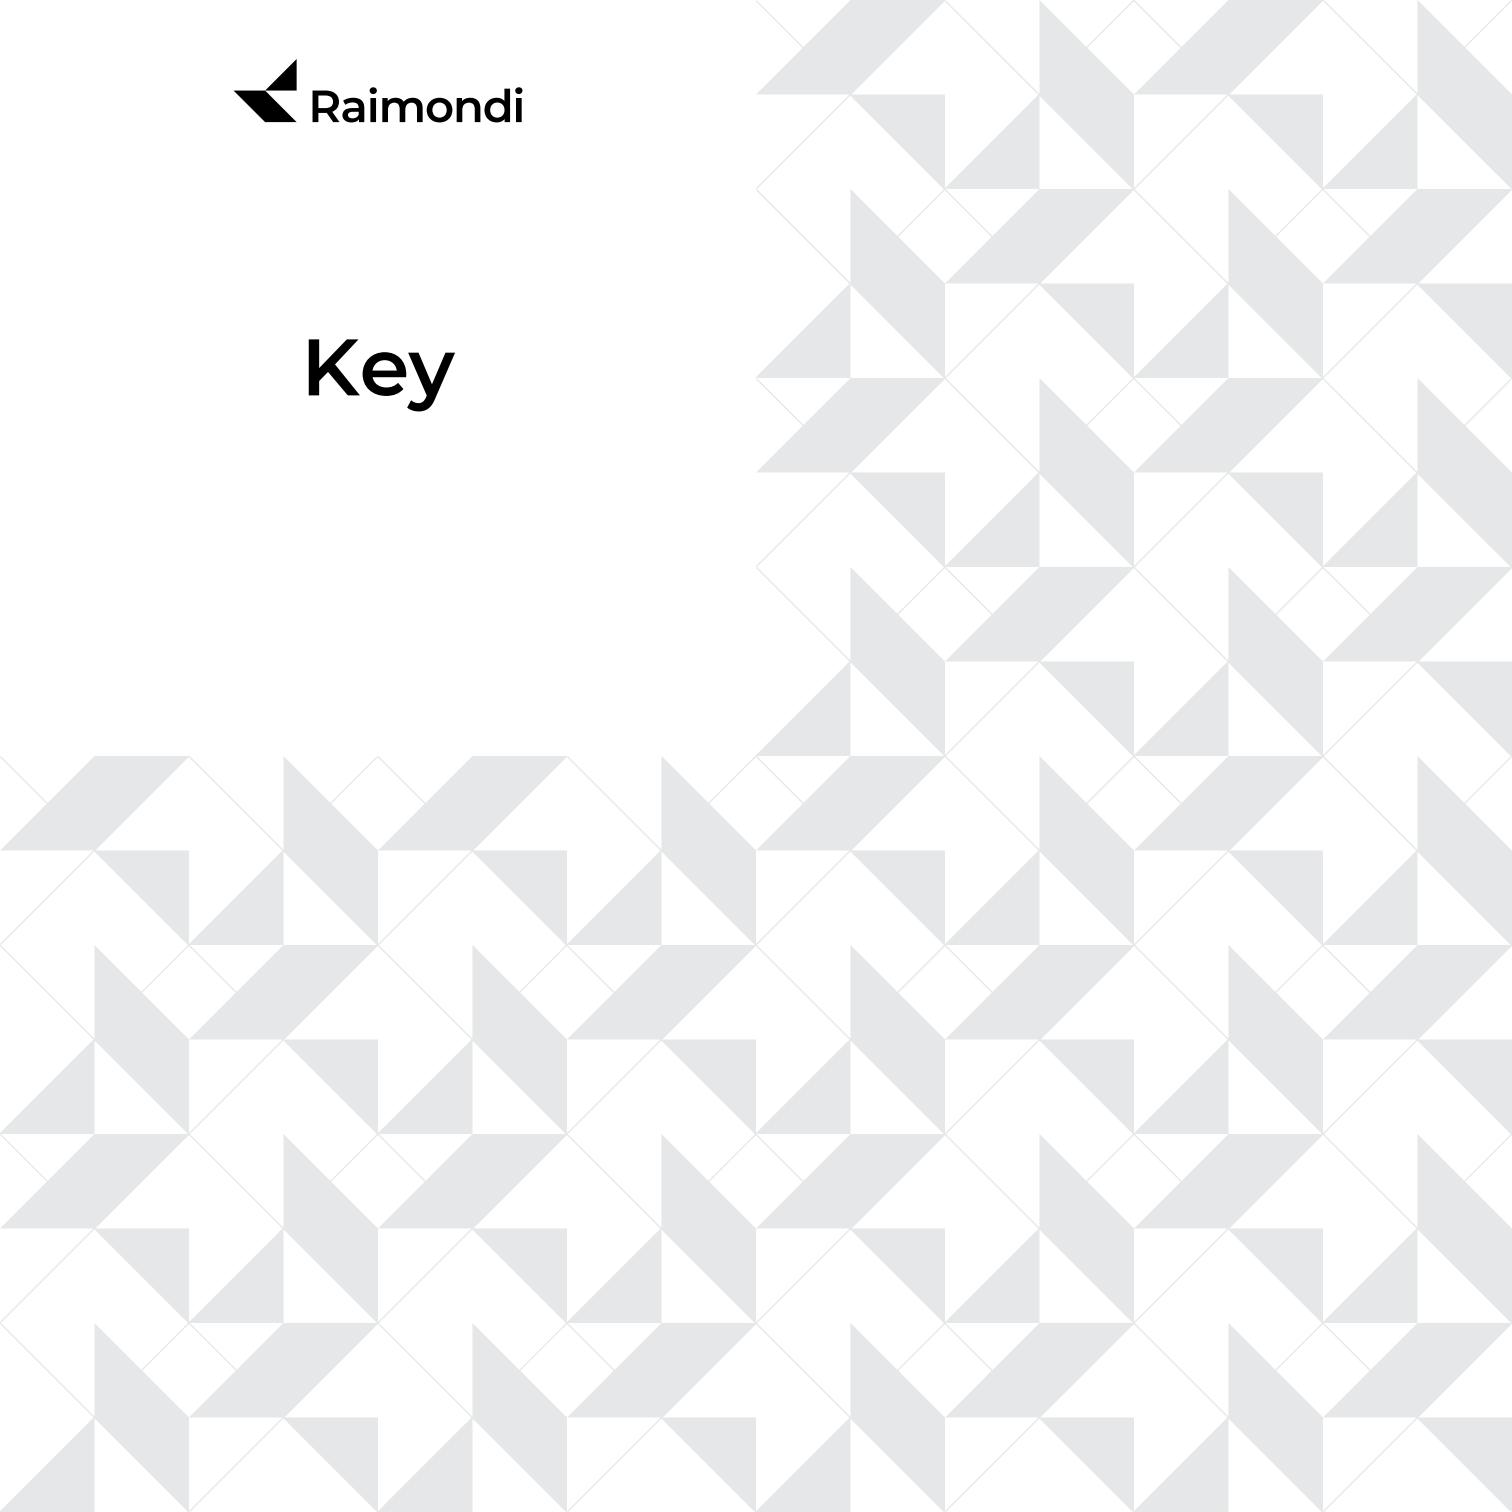


Key		Legenda	Légende	Zeichenerklärung	Условные обозначения	
		EN	IT	FR	DE	RU
	UL	Load diagrams with ultralift control	Curva di carico Ultralift	Courbes de charges Ultralift	Ultralift Lastkurven	Кривой Груз Ultralift
	HR	Main bearing level	Altezza ralla	Hauteur couronne	Drehsattel Hohe	Высота упорного подшипника
		Mechanisms	Azionamenti	Mécanismes	Antriebe	Приводы
		Jib	Freccia	Flèche	Kranarm	стрела крана
		Hook / tower axis distance with maximum load	Interasse gancio / asse torre con carico massimo	Distance crochet / axe de la tour avec la charge maximale	Abstand Haken-Turmachse (bei maximaler Last)	Положение подъемного крюка относительно оси башни при котором можно поднять максимальный груз
		Base ballast blocks	Blocchi zavorra di base	Blocs de lest	Grundballast	блок балласта
	TOPLESS	Counterweight blocks (Counterjib)	Blocco di contrappeso (Controfreccia)	Bloc de contrepoid (Contreflèche)	Gegengewichtsblöcke (gegenausleger)	Плиты противовеса (контр-стрела)
	LUFFING	Counterweight blocks (Counterjib)	Blocco di contrappeso (Controfreccia)	Bloc de contrepoid (Contreflèche)	Gegengewichtsblöcke (gegenausleger)	Плиты противовеса (контр-стрела)
	TOPLESS	Total counterweighting (Counterjib)	contrappesatura totale (Controfreccia)	Contrepoids total (Contreflèche)	Gesamt gegenauslegerballast (gegenausleger)	Тотальный балласт контр-стрелы (контр-стрела)
	LUFFING	Total counterweighting (Counterjib)	contrappesatura totale (Controfreccia)	Contrepoids total (Contreflèche)	Gesamt gegenauslegerballast (gegenausleger)	Тотальный балласт контр-стрелы (контр-стрела)
		Hoisting	Sollevamento	Levage	Heben	Подъем
		Trolleying	Traslazione carrello	Distribution	Katzfahren	Перемещение по стреле
		Luffing	Brandeggio	Relevage	Ausleger-Einziehen	Наклон стрелы
		Slewing	Rotazione	Orientation	Schwenken	Поворот
		Tower width	Larghezza torre	Largeur de la tour	Turmelementbreite	Ширина башни
		Height under hook	Altezza sotto gancio	Hauteur sous crochet	Höhe unter dem Haken	Высота под крюком

	Key	Legenda	Légende	Zeichenerklärung	Условные обозначения
	One - rope pull	Tiro a 1 fune	Tir à un câble	Einscherung 1/1	Однократная запасовка троса
	Two - rope pull	Tiro a 2 funi	Tir à deux câbles	Einscherung 2/1	Двукратная запасовка троса
	Three - rope pull	Tiro a 3 funi	Tir à trois câbles	Einscherung 3/1	Трёхкратная запасовка троса
	Four - rope pull	Tiro a 4 funi	Tir à quatre câbles	Einscherung 4/1	Четырёхкратная запасовка троса
	Base on steel pads	Base con piedi regolabili	Grue sur pieds réglables	Kran auf verstellbaren Füßen	Кран на регулируемых лапах
	Travelling base	Base traslante	Grue à traslation	Fahrbarer Kran	Кран передвижной
	Foundation legs	Gambe di fondazione	Pieds de fondation	Ankerbeine	Ножки основания
	Expendable foundation element	Tronchetto di fondazione	Elément a sceller	Fundamentanker	Анкер
	Required power	Potenza richiesta	Puissance requise	Erforderliche Leistung	Потребляемая мощность
	Wind conditions according to: ...	Condizioni del vento secondo norma: ...	Profil de vent suivant : ...	Windbedingungen gemäss: ...	Ветровой режим в соответствии с...
	Characteristics of the rope	Caratteristiche della fune	Caractéristiques de le du câble	Eigenschaften des Seils	Характеристики веревки
	Container	Container	Conteneur	Container	Футовый контейнер
	Lorry	Camion	Camion	Lkw	Грузовой автомобиль
	Max load	Carico massimo	Charge maximale	Maximale Belastung	максимальная нагрузка
	Hook / tower axis distance	Interasse gancio / asse torre	Distance crochet / axe de la tour	Abstand Haken-Turmachse	Положение подъемного крюка относительно оси башни
	Hook / tower axis distance	Interasse gancio / asse torre	Distance crochet / axe de la tour	Abstand Haken-Turmachse	Положение подъемного крюка относительно оси башни
	Speed	Velocità	Vitesse	Geschwindigkeit	скорость

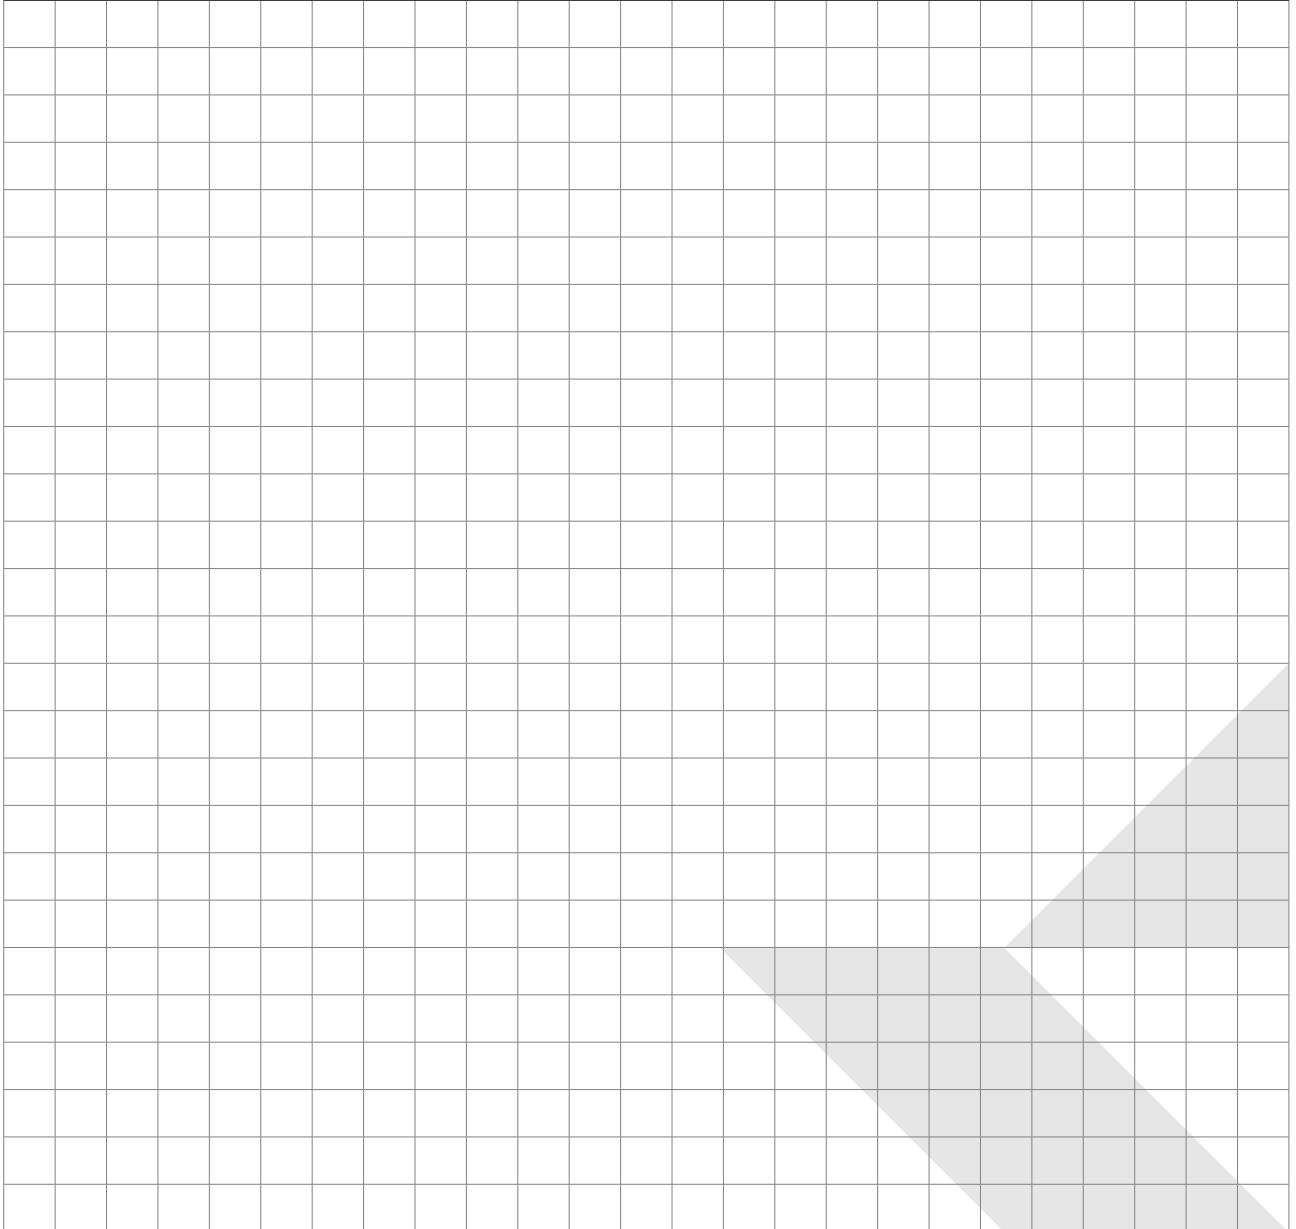

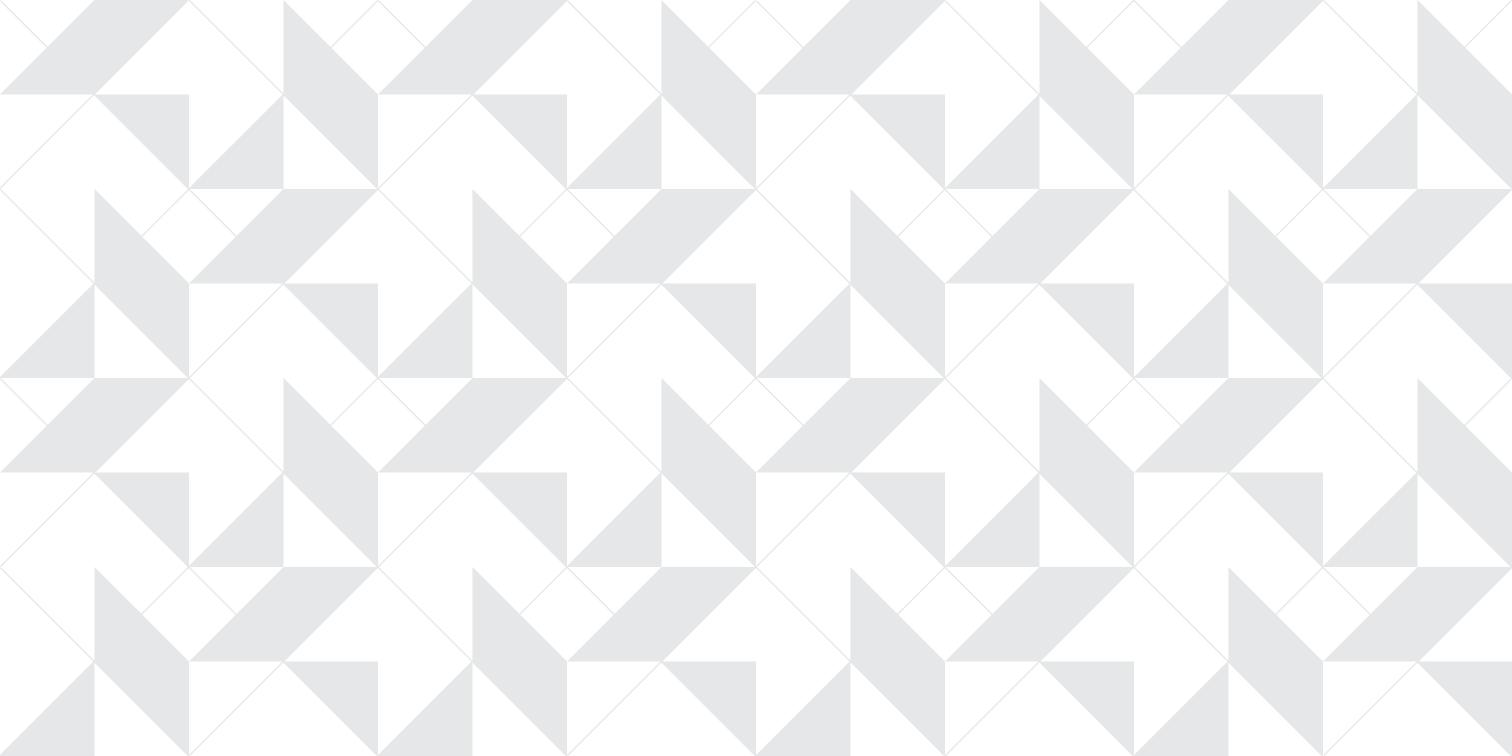

EN	The data presented in this product guide is subject to change without prior notice. Being an non-binding commercial document, the reader is required to consult instruction manuals for all technical information.
IT	I dati contenuti nel presente catalogo potrebbero subire modifiche senza preavviso. Essendo un documento commerciale non vincolante si fa obbligo di consultare il manuale di istruzioni per tutte le informazioni tecniche.
FR	Les informations données dans les fiches présentes peuvent subir des modifications sans préavis. Étant un document commercial non contraignant, il est nécessaire de consulter le manuel d'instructions pour toutes les informations techniques.
DE	Die daten der vorliegenden blätter könnten ohne vorankündigung geändert werden. Unverbindliches Vertriebsdokument. Für technische Informationen, siehe die entspr chenden Anweisungen.
RU	данные, указанные в настоящих спецификациях, могут изменяться без предварительного предупреждения. Этот коммерческий документ не является юридически обязательным. Для получения технической информации, см. соответствующие инструкции.

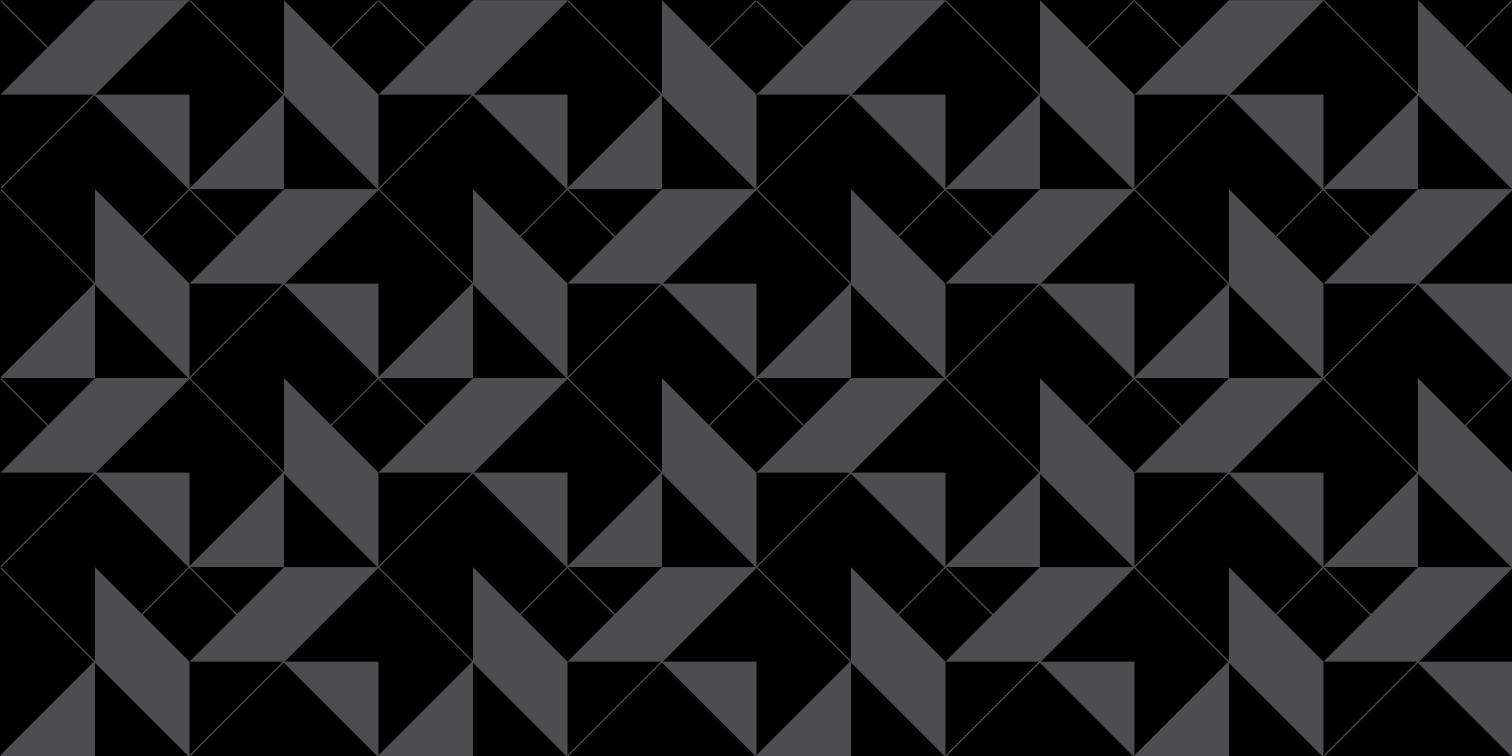

RAIMONDI CRANES S.p.A. a S.U.

Via Donatori Volontari del Sangue, 100 | 20004 Arluno MI – Italy
T. +39 02 897 086 10 | info@raimondicranes.com | www.raimondi.com