

TTC 70

TELECRAWLER
CRANE
70 T CAPACITY



Now part of  Raimondi



WE ARE BACK 




OIL & GAS



CONSTRUCTION




POWER & ENERGY



MAINTENANCE
WORKS




ROADS & RAILWAYS
CONSTRUCTION




MOBILE
EQUIPMENT
COMMISSIONING



MATERIAL
HANDLING



GENERAL
LIFTING
APPLICATIONS

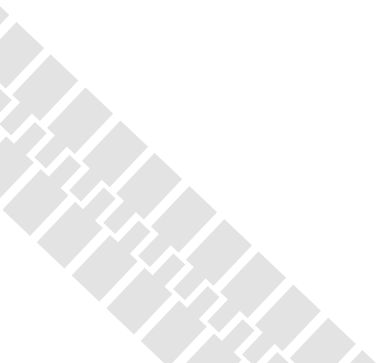



SPECIFICATIONS:


- > Maximum capacity: 70 t
- > Maximum boom length: 36,9 m
- > Minimum width: 2,9 m - Maximum width: 4,8 m
- > Operates with a maximum inclination of 4°

DISCOVER MORE




FAST SET UP

Fast to assemble once the crane is unloaded from the truck (10 minutes with the assembled counterweight).



3 TELESCOPIC BOOM MODE

Telecrawlers can retract boom with a load, offering a significant advantage in terms of efficiency, cost and time savings.



PICK & CARRY WITH THE LOAD

Ability to travel with a load makes them especially valuable in power transmission and pipeline projects.



AGILE ON ANY TERRAIN

High agility and flexibility across diverse ground conditions, with no preparation required. Ready to work even on slopes from 1° to 4°, maintaining stability and precision.



LOW GROUND PRESSURE

The large crawler track contact area significantly reduces ground pressure, guaranteeing outstanding stability across all terrains.



NEW GEN OF RADIO REMOTE CONTROL WITH TEOS DISPLAY INTEGRATED

Time and cost reduction: the counterweight can be remotely assembled and disassembled by a single operator.

POWER IS IN YOUR HANDS



HIGH VERSATILITY

- > 70 t lifting capacity
- > 36,9 m max boom length with three boom telescoping modes
- > 39,0 m max tip height main boom
- > Additional 2-section jib of 8/15 m
- > 54,0 m max tip height with jib
- > Engine stage V & IIIA

WIDE RANGE OF OPTIONS

- > New gene of radio remote control
- > Aux winch
- > Additional 2-section jib of 8/15 m
- > Up to 4 cameras for enhanced visibility, integrated on main display
- > Rooster sheave

GREAT COMFORT, EXCELLENT VISIBILITY

- > Extra wide and tiltable cabin with large glass surface. No blind spots.
- > Integrated heating and air conditioning system
- > Intuitive controls keep every function exactly where you need it, right at your fingertips.

EASY TO HANDLE

- > Easy to transport and maneuver
- > Width min. 2,9 m and max. 4,8 m

INTUITIVE CONTROLS

Intuitive controls keep every function exactly where you need it, right at your fingertips.



TECHNOLOGY



TEOS

**NEW TEOS
OPERATING
SYSTEM**

The new Terex Operating System TEOS offers improved information flow and accessibility to increase operating efficiency.


- > **10" full-color touch screen display**
- > **Intuitive navigation**
- > **Dedicated menu for diagnostics**
- > **Optional cameras are incorporated in the main display**



**T-LINK
TELEMATICS
PLATFORM**

The T-Link Telematics Platform, included on base unit, allows remote access of crane fleet operating data anytime, anywhere via the internet from your computer, smartphone or tablet.

- > **Cost savings and increased of productivity**
- > **Better management of maintenance and technical assistance**
- > **Fleet control**
- > **Improved machine management, statistics and real-time data**

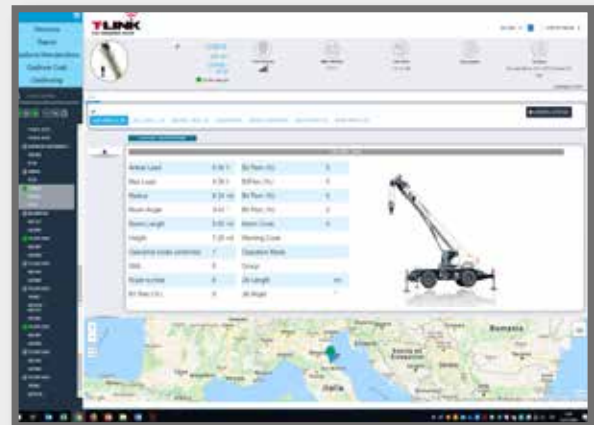

TEREX ROUGH TERRAIN CRANES

RT CRANES Italy Srl
Via Cassoletta, 76 - Fraz. Crespellano
40053 Valsamoggia (BO)
Italy
Ph: +39 051 6501011
Email: mktg.cranes@terex.com

www.terex.com/rough-terrain-cranes



Brochure Reference: BR-M-E-TTC 70-04/26

LEVEL UP